PLANT LIST

DECIDUOUS TREES

QTY	SYM	BOTANICAL NAME	COMMON NAME	SIZE	NOTES
21	AR	*Acer rubrum 'Franksred'	Red Maple	4 1/2 – 5" cal.	
3	ACA	*Amelanchier canadensis	Serviceberry	3 1/2 – 4" cal.	
7	BN	*Betula nigra 'Heritage'	Heritage River Birch	4 – 4 1/2" cal.	Single Stem
3	CBF	Carpinus betulus 'Fastigiata'	Pyramidal Hornbeam	4 – 4 1/2" cal.	
3	CC	*Cercis canadensis	Eastern Redbud	3 – 3 1/2" cal.	
4	CCA	*Carpinus caroliniana	American Hornbeam	4 – 4 1/2" cal.	
4	CK	Cornus kousa	Kousa dogwood	4 – 4 1/2" cal.	
3	CL	*Cladrastis lutea	Yellowwood	3 1/2 – 4" cal.	
7	CV	*Crataegus viridis 'Winter King'	Winter King Hawthorn	3 1/2 – 4" cal.	
50	GT	*Gleditsia triacanthos inermis 'Skyline'	Honey Locust	4 1/2 – 5" cal.	
23	FP	*Fraxinus pennsylvanica 'Cimmaron'	Green Ash	4 1/2 – 5" cal.	
11	LT	*Liriodendron tulipifera	Tulip Tree	4 1/2 – 5" cal.	
3	QC	*Quercus coccinea	Scarlet Oak	4 1/2 – 5" cal.	
4	QP	*Quercus palustris	Pin Oak	4 1/2 – 5" cal.	

EVERGREEN TREES

34	CO	Chamaecyparis obtusa 'Gracilis'	Hinoki Cypress	4 1/2 – 5' ht.

DECIDUOUS SHRUBS (PARTIAL)

48	CH	Cotoneaster horizontalis	Rockspray Cotoneaster	2 – 2 1/2' spd.
106	CST	*Cornus stolonifera 'Baileyi'	Red–twigged Dogwood	3 – 3 1/2' ht.
55	IV	*Itea virginica	Sweetspire	2 – 2 1/2' ht.
70	VD	*Viburnum dentatum 'Autumn Jazz'	Arrowwood Viburnum	3 – 4' ht.
7	VT	*Viburnum trilobum	American Cranberry Bush	3 – 4' ht.

EVERGREEN SHRUBS (PARTIAL)

95	ADV	*Azalea 'Delaware Valley White'	White Azalea	18 – 24"spd.
27	IG	*Ilex glabra 'Shamrock'	Shamrock Inkberry	2 1/2 – 3' ht.
85	RM	*Rhododendron maximum	Rosebay Rhododendron	3 – 3 1/2' ht.
11	TC	Taxus cuspidata 'Columnaris'	Columnar yew	3 – 4' ht.
75	TM	Taxus x media 'Hicksii'	Hick's Yew	2 1/2 – 3 ht.

VINES & GROUNDCOVER

To Be Specified

ORNAMENTAL GRASSES & PERENNIALS

To Be Specified

*NATIVE PLANTS
ALL OTHER PLANTS ARE NON INVASIVE

TOTAL CALIPER TREES REMOVED:	2,152
TOTAL CALIPER TREES PLANTED:	904
TOTAL CALIPER TREES UNPLANTED:	1,248

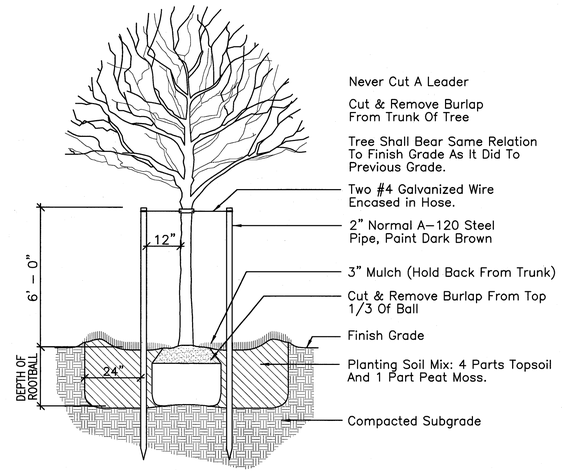

1 TREE PLANTING (public standard)
NO SCALE

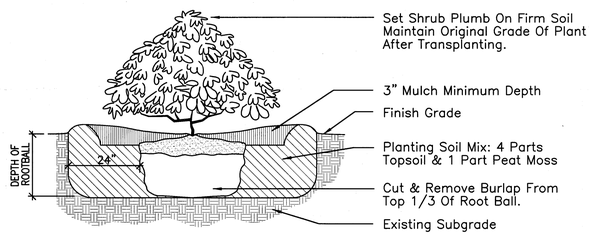

NOTE:
1. New Shrub Beds To Have A Minimum Of One Foot Planting Soil.

2 SHRUB PLANTING
NO SCALE

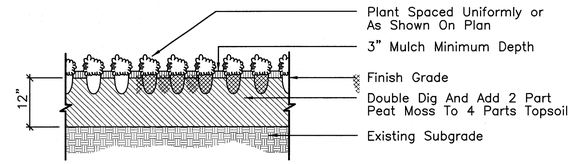

3 GROUNDCOVER & PERENNIALS
NO SCALE

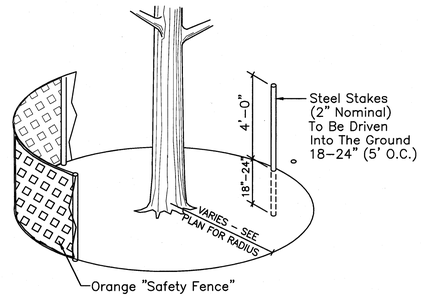

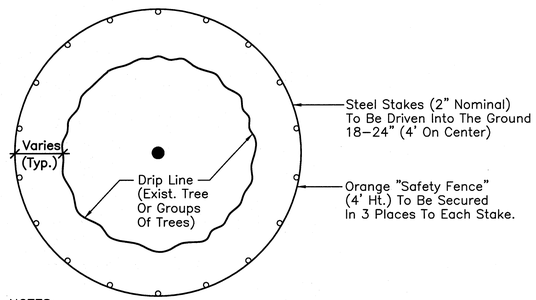

NOTES:
1. Maintain Fence Protection In Sound Condition Until Project Completion.
2. Steel stakes to be woven through safety fence and secured to stake in (3) places.
3. Landscape Architect to confirm layout locations of all protective fencing.

4 TREE PROTECTION FENCE

No.	Revision	Date

Seal: MASSACHUSETTS CLAIR CORMIC BATCHELDER REGISTERED LANDSCAPE ARCHITECT No. 706

Designed by:	CCB
Drawn by:	DC/RE/KF
Checked by:	CCB
Scale:	As Noted
Date:	8/2/2010

Prepared for:
NewEngland DEVELOPMENT
ONE WELLS AVENUE, NEWTON, MA 02459
617-243-7042, FAX 617-243-7861

Prepared by:
CB|A Landscape Architects LLC
212 ELM STREET SOMERVILLE MA 02144
phone 617.623.7509 | fax 617.776.8775
cba@cbaland.com | www.cbaland.com
landscape architecture
urban design
master planning

Project Name:
CHESTNUT HILL SQUARE
NEWTON, MA

Drawing Name:
PLANT LIST AND DETAILS

Drawing No.:
L.04

Project No.: 09057

Copyright © 2008 by R.J. O'Connell & Associates, Inc.